


## STANDART VE UZUN TİP ELASTİK DİŞLİ KAPLİNLER

## STANDARD & LONG TYPE ELASTIC GEAR COUPLINGS

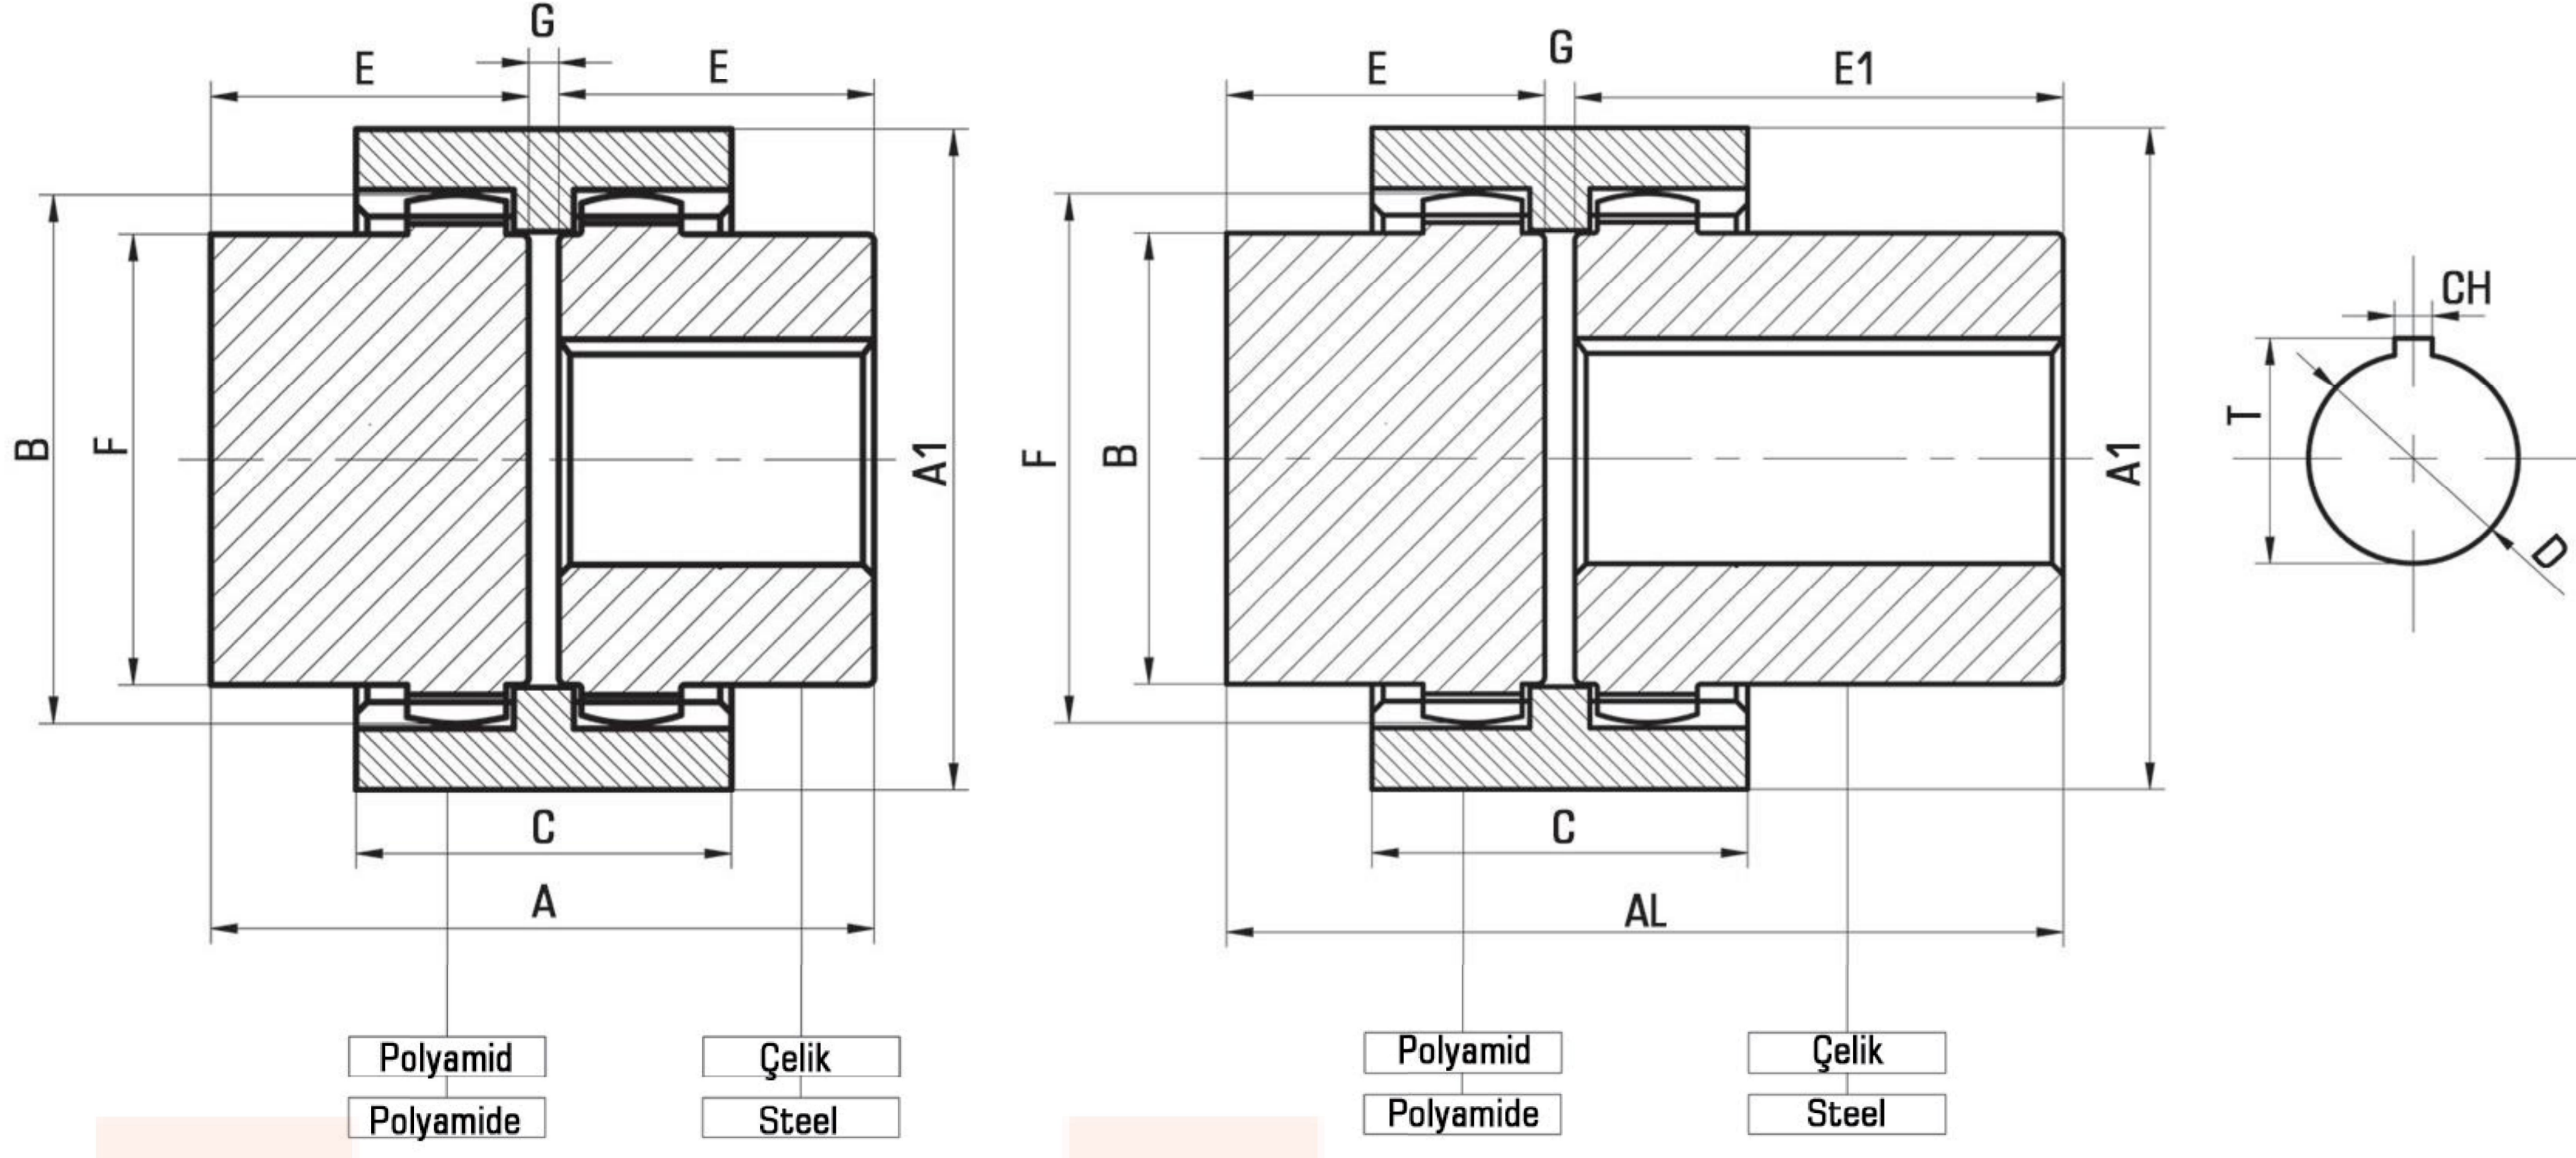

TİP TYPE	KAPLİN ÖLÇÜLERİ COUPLING DIMENSIONS									MAX.İŞLEME ÇAPI MAX.OPERATION DIA.			MOTOR GÜCÜ MOTOR POWER		MAX.DEVİR SPEED	MAX.MOMENT TORQUE
	A	A1	B	F	E	C	G	E1	AL	D	T	CH	KW	HP	Devir / Dk.	Kq / m
DÇ14 PI	44	40	33	23	21	28	1	-	-	14	16	5	0,25 * 0,37	0,35 * 0,5	6000	-----
DÇ14	51	40	33	24	24	28	3	30	57	14	16,5	5	0,25 * 0,37	0,35 * 0,5	6000	1,0-1,5
DÇ24	58	54	44	35	28	34	2	40	70	24	27	6	1,1 * 1,5	1,5 * 2	6000	2,0-3,0
DÇ28	82	68	56	45	40	40	2	60	102	28	32	8	2,2 * 4	3 * 5,5	6000	3,6-5,4
DÇ32	83	76	59	49	40	45	3	60	103	32	36	8	2,2 * 4	3 * 5,5	6000	5,0-7,5
DÇ38	85	84	68	57	42	48	2	62	105	38	42	10	5,5 * 7,5	7,5 * 10	6000	6,4-9,6
DÇ42	86	88	71	60	42	50	2	62	106	42	47	12	11 * 15	15 * 20	5000	8,0-12,0
DÇ48	100	100	78	65	47	51	3	67	120	48	53	14	18,5 * 22	25 * 30	5000	12,0-18,0
DÇ55	114	120	98	85	55	63	3	75	134	55	62	16	30	40	4000	25,0-40,0
DÇ60	138	140	111	98	68	71	2	85	155	60	67	18	37 * 45	50 * 60	3600	30,0-45,0